

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 479 574 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
24.11.2004 Bulletin 2004/48

(51) Int Cl.7: B60R 21/34

(21) Application number: 04006134.3

(22) Date of filing: 15.03.2004

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PL PT RO SE SI SK TR
Designated Extension States:
AL LT LV MK

(71) Applicant: TAKATA CORPORATION
Minato-ku, Tokyo 106-8510 (JP)

(72) Inventor: Takimoto, Takayuki
Tokyo 106-8510 (JP)

(30) Priority: 19.05.2003 JP 2003140631


(74) Representative: VOSSIUS & PARTNER
Siebertstrasse 4
81675 München (DE)

(54) External airbag device

(57) The airbag (14) includes a bag base (14a), which deploys along the lower edge of the windshield (2), and bag side segments (14b), which deploy while extending upwardly from the right and left sides of the bag base (14a) along the exteriors of "A" pillars (6). Guide rods (20) vertically extend along the exteriors of

the "A" pillars. Each of the bag side segments (14b) has a connecting strap (14c) on its top that connects the bag side segment (14b) to the guide rod (20). The connecting straps (14c) are movable along the guide rods (20). The bag side segments (14b) are guided along the guide rods (20) by the connecting straps (14c) and deploy along the exteriors of the "A" pillars (6).

Fig. 3

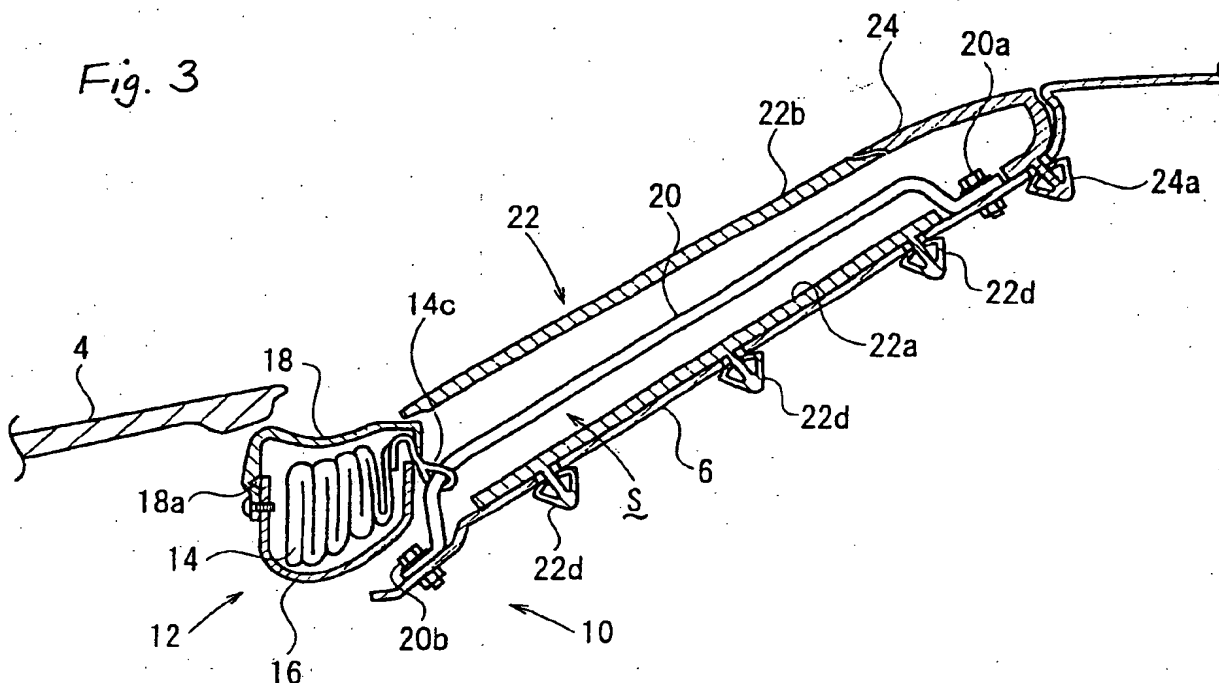

Description

[0001] The present invention relates to an externally developed airbag device of a motor vehicle for protecting pedestrians, riders on bicycles or motorcycles (hereinafter referred to as "pedestrians or the like") in the event of a collision by preventing them from directly colliding against rigid portions of the motor vehicle, such as a pillar and a fender.

[0002] JP-A-2000-264146 discloses an externally developed airbag device for protecting pedestrians or the like that prevents the pedestrians or the like from directly colliding against a "A" pillar by inflating the airbag along the right and left "A" pillars of a motor vehicle. When a collision with a pedestrian or the like is sensed, a gas generator discharges gas to inflate the airbag. The airbag pushes open a rear end of an engine bonnet or hood and comes out to the exterior of the vehicle, and then upwardly inflates along the right and left "A" pillars to cover the "A" pillars. During the inflation process or after the inflation process this known airbag is likely to deviate from the front of the "A" pillars.

[0003] It is an object of the present invention is to provide an externally developed airbag device in which an airbag reliably deploys along the predetermined areas. This object is achieved with the features of claim 1. Preferred embodiments are set forth in the dependent claims.

[0004] An externally developed airbag device according to the present invention includes an airbag deploying along the exterior of a motor vehicle body, a gas generator for inflating the airbag, and a mechanism for guiding the airbag to deploy along the predetermined areas.

[0005] In the externally developed airbag device according to the present invention, the airbag reliably deploys along the predetermined areas by the guiding mechanism. If the guiding mechanism prevents the airbag from deviating from the predetermined areas after the completion of its deployment, the deviation is avoided, for example, even if a pedestrian or the like collides with the airbag.

[0006] The present invention is preferably applied to the structure in which the airbag deploys along the exteriors of the "A" pillars; however, the present invention is not limited thereto.

[0007] According to the present invention, the guiding mechanism are preferably guide rods because of the simplicity.

[0008] Covers that cover the guide rods may be mounted to improve the appearance. In addition, the covers prevent any foreign materials from being attached to the guide rods, thereby providing considerably smooth guiding of the airbag.

[0009] According to the present invention, the mechanism for removing the foreign materials from the guiding mechanism is provided. As a result, the airbag can significantly smoothly deploy along the guiding mechanism all the time.

[0010] The mechanism for removing any foreign materials may be mechanical, such as wipers, or a heating mechanism for melting snow or ice.

[0011] The heating mechanism may be electric heaters or a mechanism for utilizing waste heat of, for example, the engine or the radiator.

[0012] Embodiments of the present invention will now be described with reference to the accompanying drawings.

Fig. 1 is a perspective view of an externally developed airbag device according to an embodiment of the present invention in the vicinity of an "A" pillar of the vehicle,

Fig. 2 is a perspective view of an airbag module in the externally developed airbag device.

Fig. 3 is a cross-sectional view along line III-III in Fig. 1,

Fig. 4 is a cross-sectional view along line IV-IV in Fig. 1;

Fig. 5 is an exploded perspective view of the externally developed airbag device;

Fig. 6 is a perspective view showing the externally developed airbag device in an intermediate state of its deployment;

Fig. 7 is a cross-sectional view along line VII-VII in Fig. 6;

Fig. 8 is a perspective view showing the externally developed airbag device in a completed state of its deployment;

Fig. 9 is a cross-sectional view along line IX-IX in Fig. 8;

Fig. 10 is a cross-sectional view of another structure of a cover;

Fig. 11 is a cross-sectional view of another structure of a cover;

Fig. 12 is a cross-sectional view of another structure of a cover;

Fig. 13 is a cross-sectional view of one embodiment without a cover.

[0013] An airbag module 12 of the externally developed airbag device 10 is disposed between a lower edge of a windshield (front glass) 2 and a rear end of an engine bonnet or hood 4 of a motor vehicle 1. The airbag module 12 includes an airbag 14 that inflates to cover the periphery of the windshield 2, an open-top, box-like casing 16 accommodating the folded airbag 14, a module cover 18 disposed on the top of the casing 16, and a gas generator (not shown) to inflate the airbag. The module cover 18 has a tear line 18a. When the airbag 14 inflates, the tear line 18a is torn and the module cover 18 starts to open, thus allowing the airbag 14 to start deploying.

[0014] In this embodiment, with reference to Fig. 8, the airbag 14 includes a bag base 14a, which deploys along the lower edge of the windshield 2 in the transverse or width direction of the vehicle, and bag side seg-

ments 14b, which deploy while extending upwardly from the right and left sides of the bag base 14a along the exteriors of "A" pillars 6. Each of the bag side segments 14b has an annularly-shaped connecting strap 14c on its top which lets through a guide rod 20, which will be described hereinafter.

[0015] Additionally, with reference to Figs. 7 and 9, the outer shell of the airbag 14 includes a lower panel 14d which is in contact with the exteriors of the windshield 2 and the "A" pillars 6, and an upper panel 14e which opposes the lower panel 14d. The lower panel 14d and the upper panel 14e are joined together about their peripheries by, for example, sewing to form a bag. Also, the lower panel 14d and the upper panel 14e are connected by a connection panel 14f inside the airbag. The connection panel 14f prevents the lower panel 14d from excessively protruding from the exteriors of the windshield 2 and the "A" pillars 6 when the airbag 14 inflates. The connection panel 14f has an opening 14g, through which chambers on both sides of the connection panel 14f communicate, thereby allowing the air pressures in the chambers to be identical when the airbag 14 inflates.

[0016] A casing 16 is disposed along the lower edge of the windshield 2. The right and left ends are located in the vicinity of the bottom ends of the right and left "A" pillars 6, respectively. The bag base 14a of the airbag 14 is connected to the interior of the casing 16. The casing 16 accommodates the airbag 14, where the right and left bag side segments 14b are folded from their tops towards the bag base 14a in a zigzag fashion and the bag base 14a is folded in a zigzag fashion in the length direction of the vehicle to become a transversely long folded structure whose long edge is oriented in the width direction of the vehicle.

[0017] With reference to Fig. 2, the right and left ends of the module cover 18 have small notch-like openings 18b. The connecting straps 14c are pulled out of the casing 16 through the small openings 18b.

[0018] Each of the "A" pillars 6 has the guide rod 20 that guides the deployment of each bag side segment 14b of the airbag 14. The guide rod 20 is a straight bar that substantially vertically extends along the exterior of the "A" pillar 6. The top and bottom ends of the guide rod 20 are secured to the top and bottom ends of the "A" pillar 6 by a blind rivet 20a and a bolt 20b, respectively. The blind rivet 20a and the bolt 20b are fixed to holes 6a and 6b shown in Fig. 5, respectively.

[0019] The connecting straps 14c loosely surround the guide rods 20 and are movable along the guide rods 20.

[0020] Each of the "A" pillars 6 has a cover 22 which covers the guide rod 20. In this embodiment, the cover 22 has a base section 22a that is in contact with the exterior of the "A" pillar 6 and a cover section 22b that covers the guide rod 20 at the front thereof. The right edges of the base section 22a and the cover section 22b are seamlessly connected and the same applies to the left edges thereof. A space S surrounded by the base

section 22a and the cover section 22b produces a through-hole inside the cover 22 extending along the "A" pillar 6. The guide rod 20 is disposed in the space S. With reference to Fig. 4, the base section 22a is mounted so that it covers the joint line of the "A" pillar 6 and the windshield 2, thus functioning as a weather strip.

[0021] In this embodiment, a tear line 22c extends on the back side surface of the cover section 22b along the windshield 2 side edge of the cover section 22b. The tear line 22c is torn by the connecting strap 14c while the connecting strap 14c slides along the guide rod 20, thus allowing the connecting strap 14c to move. The position of the tear line 22c is not limited thereto. It may be formed substantially at the center of the cover section 22b in the transverse direction.

[0022] To secure the cover 22 to the "A" pillar 6, a plurality of snap fasteners 22d (three in this embodiment) is arranged at some intervals along the "A" pillar 6 extending direction to protrude from the back surface of the cover section 22b. The snap fasteners 22d are engaged with holes 6c shown in Fig. 5.

[0023] With reference to Fig. 5, when the guide rod 20 and the cover 22 are attached to the "A" pillar 6, the guide rod 20 is inserted into the cover 22 and the connecting strap 14c is let through the guide rod 20 beforehand. Then, the top and bottom ends of the guide rod 20 are secured to the "A" pillar 6 by the blind rivet 20a and the bolt 20b. Subsequently, the snap fasteners 22d are pushed into the corresponding holes 6c to secure the cover 22 to the "A" pillar 6.

[0024] As shown in Fig. 5, the length of the guide rod 20 is greater than the length, from the top end to the bottom end, of the cover 22. Accordingly, both end portions of the guide rod 20 protrude from the ends of the cover 22. In this embodiment, after the guide rod 20 and the cover 22 are attached to the "A" pillar 6, an upper cover 24 is mounted to be aligned to the upper edge of the windshield 2. The upper cover 24 is designed so that the right and left end portions of the upper cover 24 cover the top ends of the right and left "A" pillars, respectively. The upper cover 24 also covers the top portions of the guide rods 20 that protrude from the top ends of the covers 22.

[0025] Snap fasteners 24a are arranged to protrude from the back surface of the upper cover 24. The snap fasteners 24a are engaged with holes 6d which are disposed at the top ends of the "A" pillars 6 and at the upper portion of the windshield 2 to secure the upper cover 24.

[0026] With reference to Figs. 1 and 3, the airbag module 12 is disposed so that the right and left ends of the module cover 18 are positioned in the vicinity of the lower sides of the covers 22. The bottom end portions of the guide rods 20 are covered by the module cover 18.

[0027] In this embodiment, with reference to Fig. 1, the right and left covers 22, the upper cover 24, and the module cover 18 look like one cover surrounding the periphery of the windshield 2.

[0028] Additionally, a sensor (not shown) is mounted

in the front bumper or near the bumper of the motor vehicle 1 to sense or predict a collision between a pedestrian or the like and the motor vehicle 1. The externally developed airbag device 10 has a control circuit to instruct the above-described gas generator to discharge gas when triggered by the sensor signal.

[0029] In this externally developed airbag device 10, when the sensor senses or predicts a collision between a pedestrian or the like and the motor vehicle 1, the gas generator discharges gas when triggered by the sensor signal and the airbag 14 starts to inflate by the gas from the gas generator. Subsequently, the bag base 14a pushes open the module cover 18 to deploy while covering the lower edge of the windshield 2, and the bag side segments 14b deploy while upwardly protruding from the right and left ends of the bag base 14a along the exteriors of the "A" pillars 6.

[0030] During the deployment, the top end of each bag side segments 14b is guided to the guide rod 20 by the connecting strap 14c. As the bag side segment 14b upwardly deploys, the connecting strap 14c moves to the top end of the guide rod 20 while tearing off the cover 22. Since the bag side segment 14b is connected to the guide rod 20 via the connecting strap 14c, the bag side segment 14b deploys along the guide rod 20, thus reliably covering the exterior of the "A" pillar 6. In addition, the bag side segment 14b is connected to the guide rod 20 via the connecting strap 14c even after the completion of its deployment. As a result, even if a pedestrian or the like collides with the bag side segments 14b, the shift to the right or left due to the load from a pedestrian or the like is prevented, thus reliably holding and protecting the pedestrian or the like.

[0031] In this embodiment, since the guide rods 20 are used for guiding the deployments of the bag side segments 14b, the structure of the externally developed airbag device 10 is simplified.

[0032] In this embodiment, since the guide rods 20 are covered by the covers 22, the upper cover 24, and the module cover 18, the appearance of the motor vehicle 1 is improved. Additionally, the covers 22, 24, and 18 prevent any foreign materials from attaching to the guide rods 20. As a result, the bag side segments 14b are smoothly guided by the guide rods 20 all the time.

[0033] In this embodiment, as shown in Fig. 4, each of the covers 22 surrounds the guide rod 20 and allows the connecting strap 14c to move along the guide rod 20 by being torn by the connecting strap 14c. However, like the covers 26, 28, and 30 shown in Figs. 10 to 12, the covers may have pre-installed open parts that allow the connecting straps 14c to move. Figs. 10 to 12 are substantially transverse sectional views of the "A" pillar 6 which illustrate the structures of the cover 26, 28, and 30, respectively.

[0034] With reference to Fig. 10, each of the covers 26 has a base section 26a that is in contact with the exterior of the "A" pillar 6 and a cover section 26b that covers the guide rod 20 at the front thereof (the upper

side in Fig. 10). In this embodiment, the outer side edges of the base section 26a and the cover section 26b (the opposite side edges to the windshield 2) are connected while the inner side edges of the base section 26a and the cover section 26b (the windshield 2 side edges) are separated. An open part 26c, which is a gap between the inner side edges of the base section 26a and the cover section 26b, allows the connecting strap 14c (not shown in Fig. 10) to move along the guide rod 20.

[0035] The cover 26 having the pre-installed open part 26c, which allows the connecting strap 14c to move along the guide rod 20, more smoothly moves the connecting strap 14c along the guide rod 20.

[0036] With reference to Fig. 11, each of the covers 28 also has a base section 28a that is in contact with the exterior of the "A" pillar 6 and a cover section 28b that covers the guide rod 20 at the front thereof (the upper side in Fig. 11). Like the above-described embodiment, the outer side edges of the base section 28a and the cover section 28b are connected while the inner side edges of the base section 28a and the cover section 28b are separated. An open part 28c, which is a gap between the inner side edges of the base section 28a and the cover section 28b, allows the connecting strap 14c (not shown in Fig. 11) to move along the guide rod 20.

[0037] In this embodiment, a protrusion 28d is arranged to protrude from the inner side edge of the base section 28a towards the inner side edge of the cover section 28b. The protrusion 28d extends across the open part 28c and the top end of the protrusion 28d extends past the side edge of the cover section 28b on the inner side of the cover 28. In Fig. 11, the protrusion 28d is separated from the side edge of the cover section 28b; however, both may be in contact with each other.

[0038] The protrusion 28d of the cover 28 suppresses or prevents any foreign materials from entering the interior of the cover 28 through the open part 28c.

[0039] With reference to Fig. 12, each of the covers 30 has a base section 30a that is in contact with the exterior of the "A" pillar 6 and half cover sections 30b and 30c that are arranged to protrude from the inner and outer side edges of the base section 30a while each wrapping the guide rod 20 at the front thereof (the upper side in Fig. 12). An open part 30d, which is a gap between the top ends of the half cover sections 30b and 30c, allows the connecting strap 14c (not shown in Fig. 12) to move along the guide rod 20.

[0040] In this embodiment, the top portion of the half cover section 30b overlaps the back side of the top portion of the half cover section 30c, thus suppressing or preventing any foreign materials from entering the interior of the cover 30 through the open part 30d. In Fig. 12, the top portion of the half cover section 30b is separated from the top portion of the half cover section 30c; however, both may be in contact with each other.

[0041] In the covers 26, 28, and 30 shown in Figs. 10 to 12, the base section 26a, 28a, or 30a is mounted so that it covers the joint line of the "A" pillar 6 and the wind-

shield 2, thus functioning as a weather strip.

[0042] According to the present invention, with reference to Fig. 13, the covers which cover the guide rods may be removed. According to an embodiment shown in Fig. 13, the guide rod 20 is externally exposed. A weather strip 32 is mounted to cover the joint line of the "A" pillar 6 and the windshield 2 instead of the cover. Fig. 13 is a substantially transverse sectional view of the same portions in Figs. 10 to 12.

[0043] According to the present invention, a mechanism for removing the foreign materials from the guide rods may be provided. This structure allows the airbag to more smoothly move along the guide rod all the time.

[0044] The mechanism for removing the foreign materials may be mechanical, such as wipers, or may be a heating mechanism for removing snow or ice by melting. The heating mechanism may be electric heaters or a mechanism for utilizing waste heat of, for example, the engine or the radiator.

[0045] The above-described embodiments are only examples of the present invention. The present invention can be applied to other applications. For example, while the airbag deploys along the exteriors of the "A" pillars in the above-described embodiments, the present invention can be applied to the applications where the airbag deploys in another area.

[0046] As stated above, the present invention provides an externally developed airbag device that reliably deploys along the predetermined area.

24, 26, 28) for removing foreign materials.

6. An externally developed airbag device according to Claim 5, wherein the mechanism for removing the foreign materials include heating mechanism for melting snow or ice.
7. An externally developed airbag device according to any one of claims 3 to 6, wherein the airbag (14, 14a, 14b) comprises bag side segments (14b) which are connected with the guide rods (20) via connecting straps (14c).

Claims

1. An externally developed airbag device comprising:

an airbag (14, 14a, 14b) deploying along the exterior of a motor vehicle body;
a gas generator for inflating the airbag; and
a mechanism (20, 14c) for guiding the airbag (14b) to deploy along predetermined areas.

2. An externally developed airbag device according to Claim 1, wherein the predetermined areas are the exteriors of "A" pillars (6) of a motor vehicle.

3. An externally developed airbag device according to Claim 1 or 2, wherein the mechanism for guiding the airbag comprises guide rods (20) extending along the predetermined areas.

4. An externally developed airbag device according to Claim 3, further comprising covers (18, 18a, 22, 22a, 22b, 24, 26, 28, 30) for covering the guide rods (20).

5. An externally developed airbag device according to any of Claims 1 to 4, wherein the mechanism for guiding the airbag comprises a mechanism (18, 22,

Fig. 1

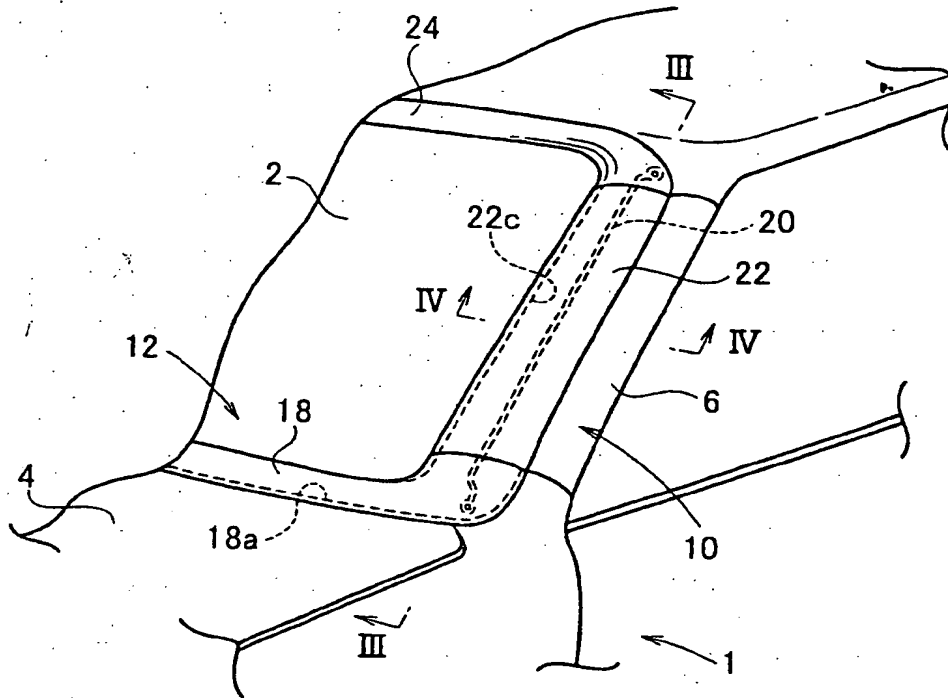


Fig. 2

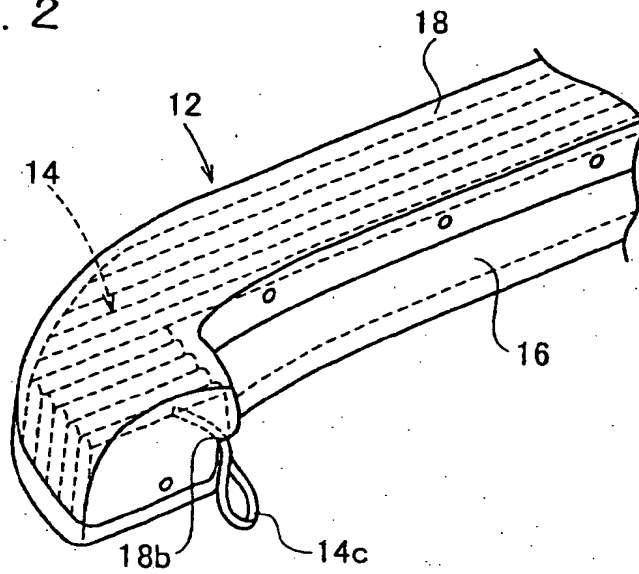


Fig. 3

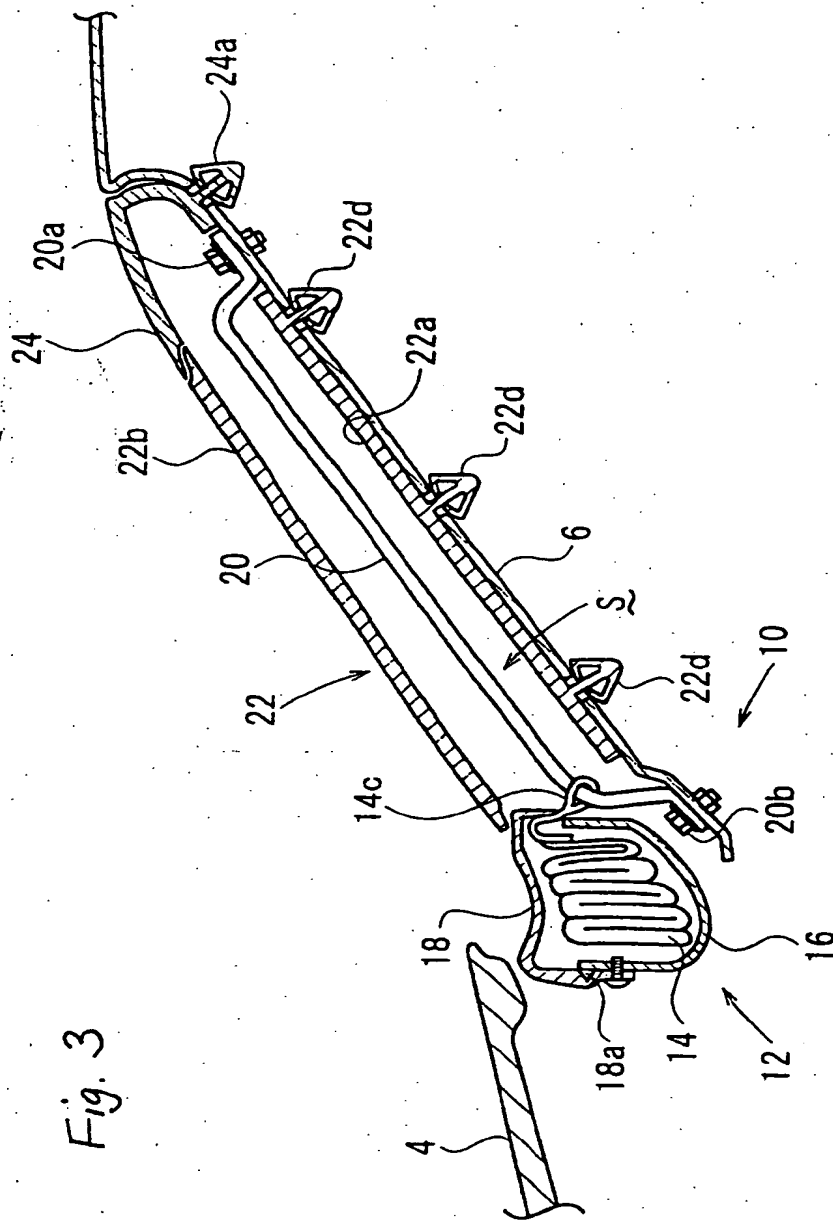
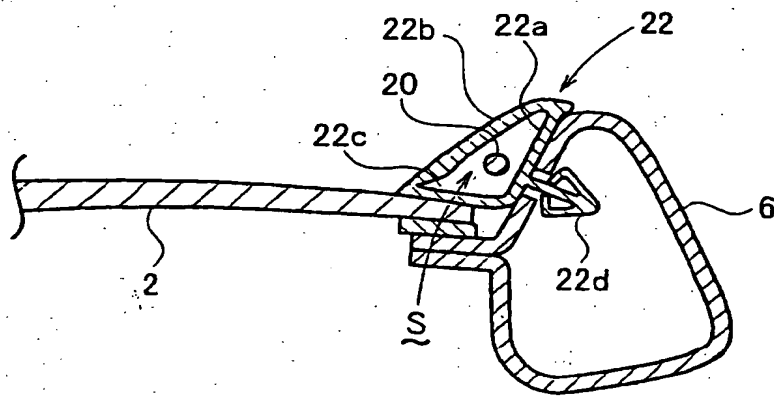


Fig. 4



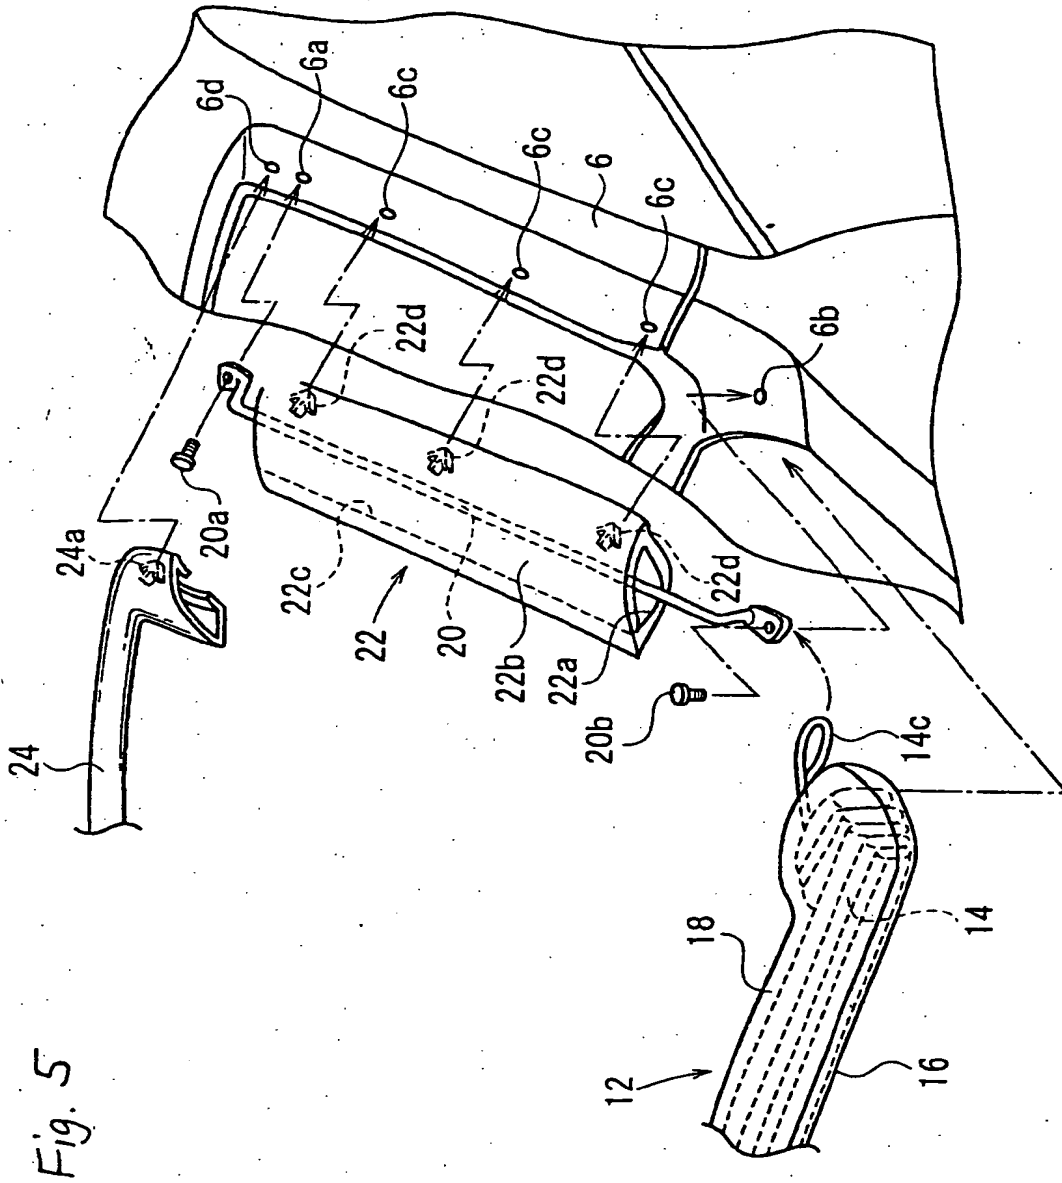


Fig. 6

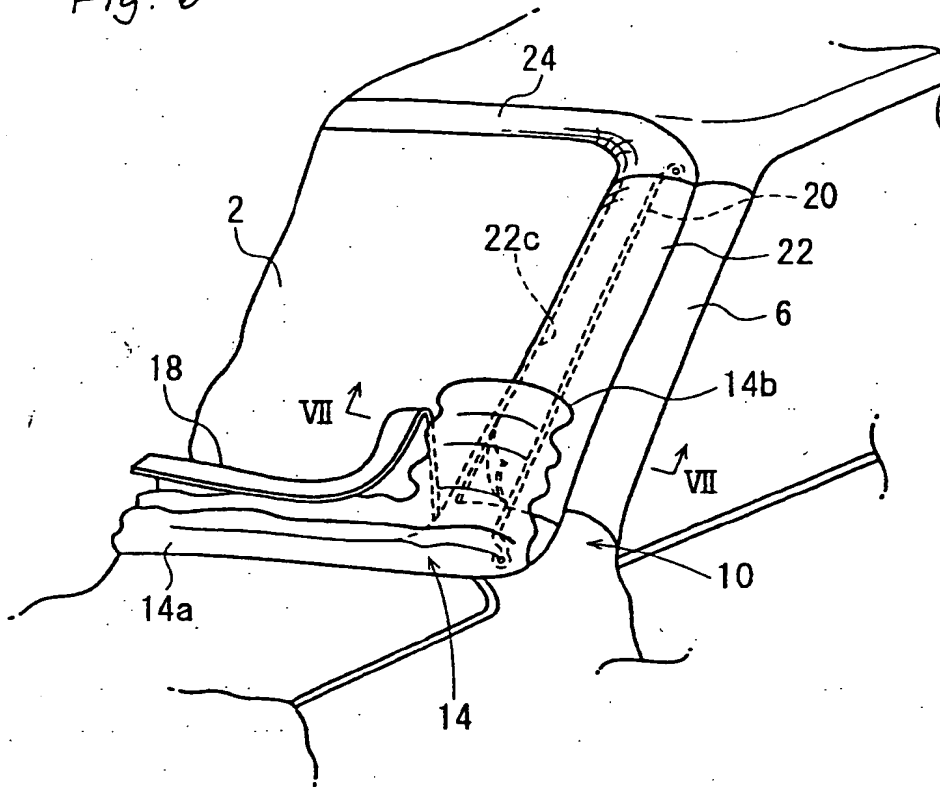


Fig. 7

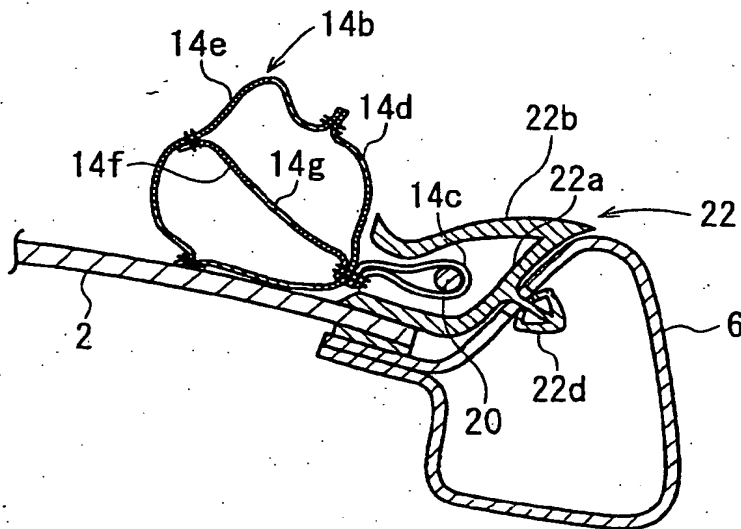


Fig. 8

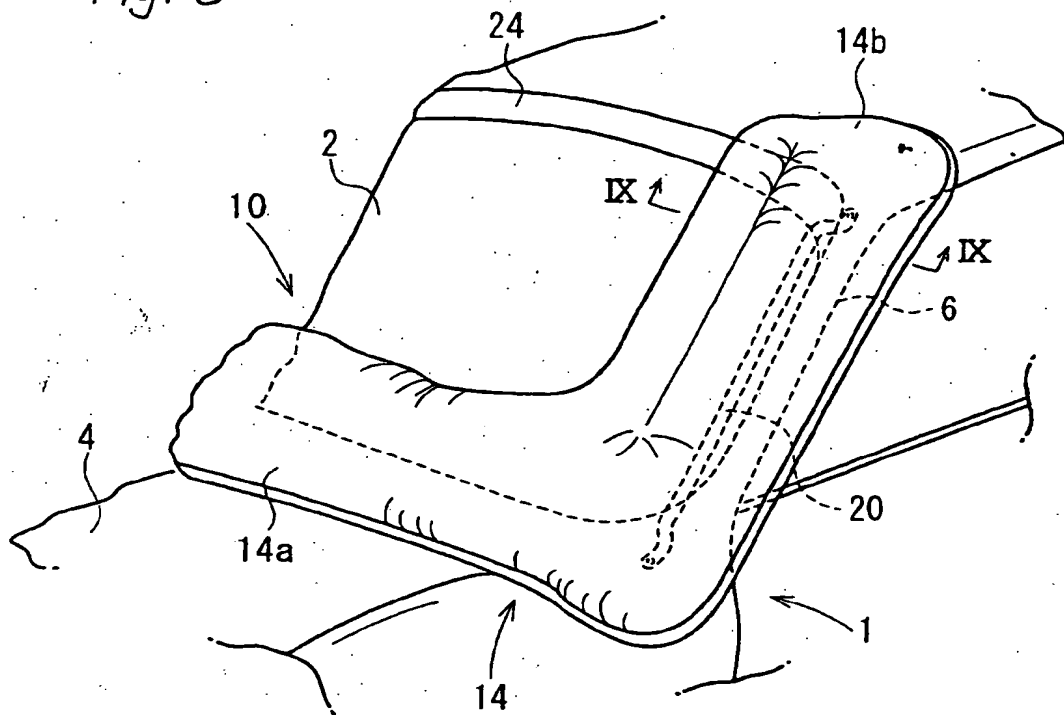


Fig. 9

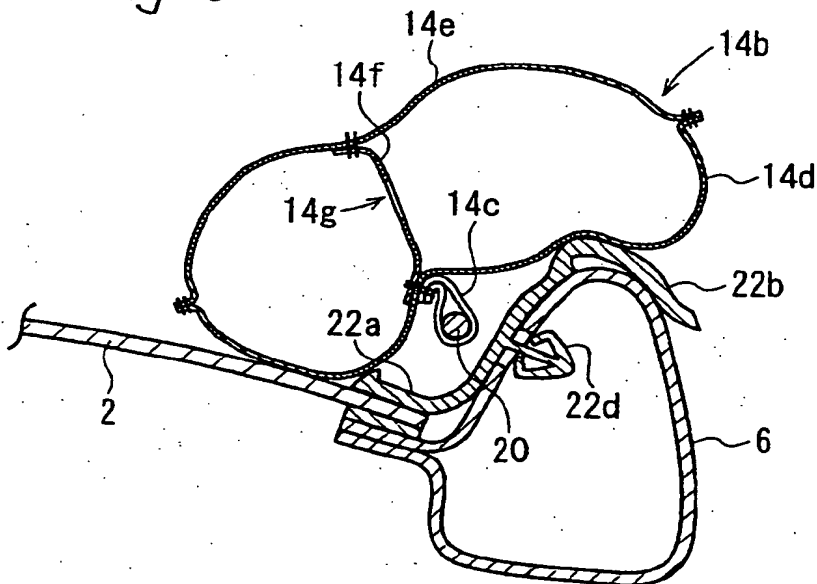


Fig. 10




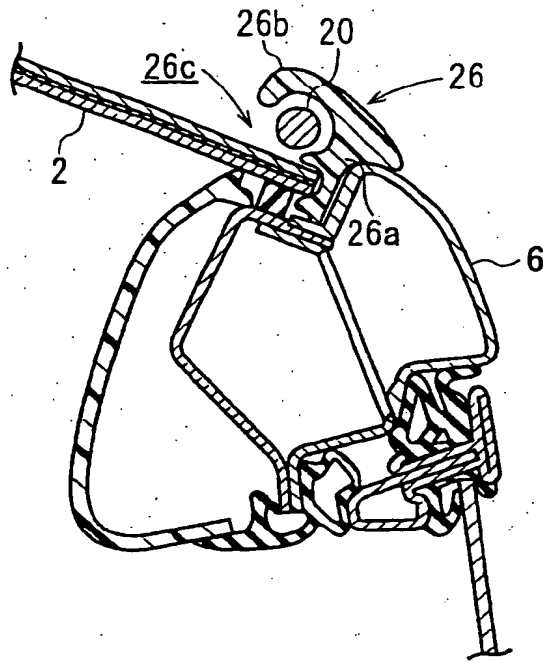


Fig. 11

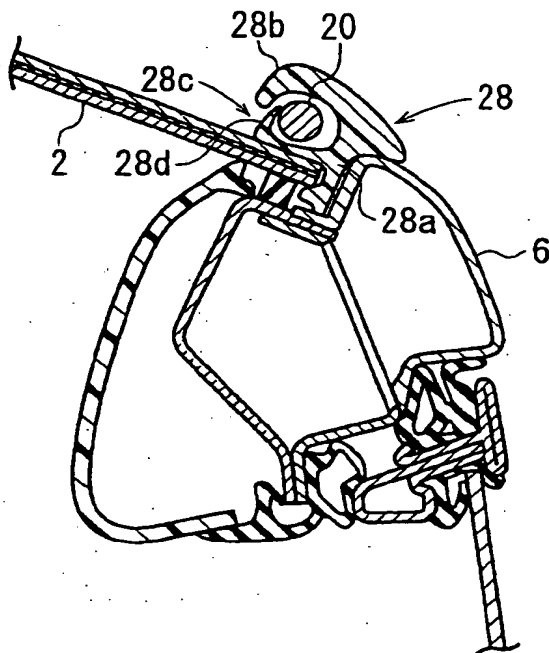

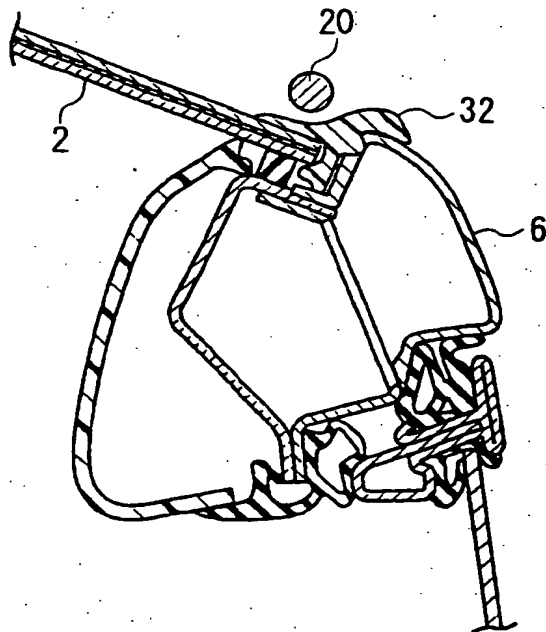

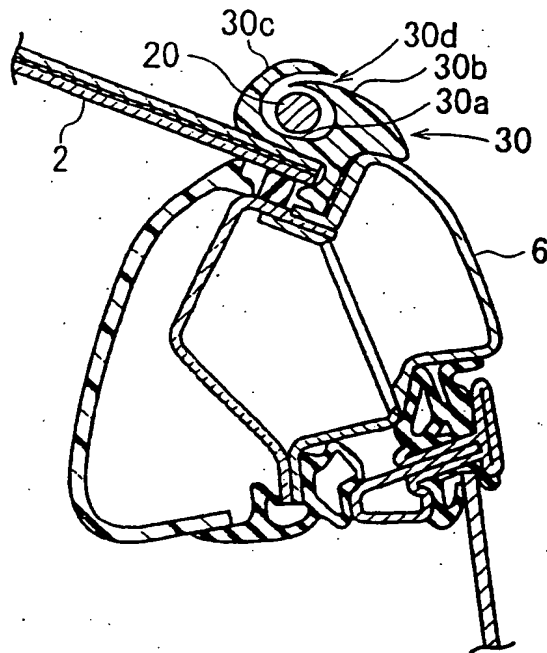

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 04 00 6134

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	WO 03/022644 A (AUTOLIV DEV ; ERIKSSON MAGNUS (SE)) 20 March 2003 (2003-03-20) * the whole document *	1,2	B60R21/34
X	DE 201 19 579 U (TRW REPA GMBH) 29 May 2002 (2002-05-29) * the whole document *	1,2	
Y		3,4,7	
Y	US 2003/080541 A1 (JAKOVSKI JOVICA J ET AL) 1 May 2003 (2003-05-01) * the whole document *	3,4,7	
A	EP 0 955 213 A (BAYERISCHE MOTOREN WERKE AG) 10 November 1999 (1999-11-10) * the whole document *	3,7	
A	US 6 140 609 A (JONES THADDEUS M) 31 October 2000 (2000-10-31) * the whole document *	5,6	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			B60R B60S
The present search report has been drawn up for all claims			
Place of search Berlin		Date of completion of the search 7 July 2004	Examiner Busuiocescu, B
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03 02 (p04001)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 04 00 6134

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

07-07-2004

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 03022644	A	20-03-2003	GB 2379418 A	12-03-2003
			WO 03022644 A1	20-03-2003
DE 20119579	U	29-05-2002	DE 20119579 U1	29-05-2002
			DE 10254936 A1	12-06-2003
			FR 2832966 A1	06-06-2003
			JP 2003182485 A	03-07-2003
US 2003080541	A1	01-05-2003	WO 03037677 A2	08-05-2003
EP 0955213	A	10-11-1999	DE 19820568 A1	11-11-1999
			DE 59903284 D1	12-12-2002
			EP 0955213 A1	10-11-1999
US 6140609	A	31-10-2000	NONE	

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82